Cat[®] Prime Application Grease

For medium-load, medium-speed applications

NLGI Grade 2



Discover the Difference

Factory-Fill—Used as standard factory-fill for most Cat machines.

Long Life—Lithium complex grease, enhanced with 3% molybdenum disulfide (moly), in medium-load, medium-speed and moderate temperature applications in a low moisture environments.

Reduced Component Wear—Resists softening and protects parts from wear.

Corrosion Protection—Resists oxidation and protects metal against rust. Will not corrode or damage steel, copper bearing alloys or conventional seal material.





Cat® Prime Application Grease

Operating Temperature Range, °C

Operating Temperature Range, °F

Base Oil Type

ASTM D445 Base Oil Viscosity 40°C, mm²/s

Thickener Type

ASTM D2265 Dropping point, °C

ASTM D217 Penetration, worked 60, mm/10

ASTM D1831 Roll stability, penetration change, mm/10


ASTM D2266 4 Ball wear, scar diameter, mm

ASTM D2596 4 Ball weld load, kg

ASTM D1743 Rust prevention

ASTM D4048 Copper corrosion

Grease Selection Guide

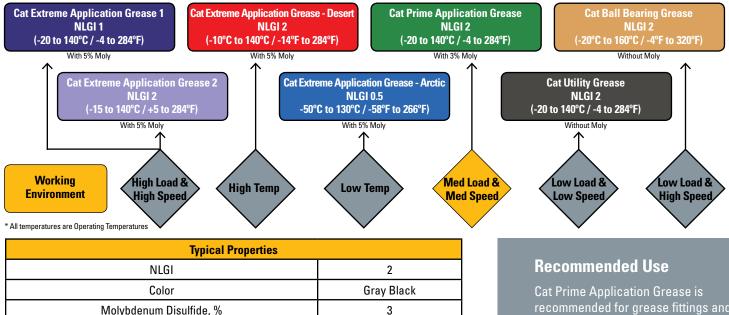

-20 to +140

-4 to +284

Mineral

320

Lithium Complex

260

280

-3

0.47

400

Pass

1A

recommended for grease fittings and lubrication points in medium-load, medium-speed applications where operating temperatures range from -20°C to +140 °C (-4°F to +284 °F).

Health and Safety

For information on proper use for health, safety and environment, please refer to the Material Safety Data Sheet (MSDS). Read and understand the MSDS before using this product. Always observe good hygiene measures. For a copy of the MSDS, contact us or visit the web at www.catmsds.com.

ASTM D1264 Water wash-out, 79°C, mass % 6 The values shown are typical values and should not be used as quality control parameters to either accept or reject product. Specifications are subject to change without notice.

CAT DEALERS DEFINE WORLD-CLASS PRODUCT SUPPORT.

We offer you the right parts and service solutions, when and where you need them.

The Cat Dealer network of highly trained experts keeps your fleet up and running to maximize your equipment investment.

BUILT FOR IT.

PEHJ0404 www.cat.com



© 2014 Caterpillar • All Rights Reserved • Printed in USA CAT, CATERPILLAR, BUILT FOR IT, their respective logos, "Caterpillar Yellow", the "Power Edge" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

